


用户手册 USER GUIDE

显卡水冷头 VGA Blocks

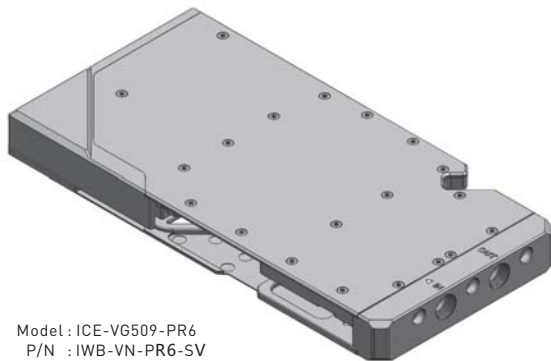

Model : ICE-VG509-PR6
P/N : IWB-VN-PR6-SV
NVIDIA RTX Pro 6000


注意事项

1. 请将本产品放置及储存于小孩可接触的范围之外。
2. 安装前请检查产品状况及零件数量，如有任何问题，请联系您所购买的商店以提供换货或退货服务。
3. 本产品请由合格的技术人员进行安装。不正确的安装可能会导致设备损坏。IceManCooler不承担任何不当使用及安装造成的责任。
4. 本产品的保修封条一旦撕开或移除则保修立即失效，IceManCooler将不对此产品提供保修。
5. 本产品保修期限为一年。
6. 本手册如有更改恕不另行通知，请访问我们的网站获取更新。


Note

1. Keep and store the product away from the reach of children.
2. Check the condition and component list of the product, If there is any problem, contact shop where you purchased to get a replacement or refund.
3. This product must be installed by qualified technicians. Incorrect installation may cause damage to the equipment. IceManCooler does not assume any responsibility for improper use and installation.
4. Breaking the warranty seal on the product will result in loss of warranty.
5. Product warranty period is one years.
6. This guide is subject to change without notice, Please browse our website for updates.

配件清单Contents

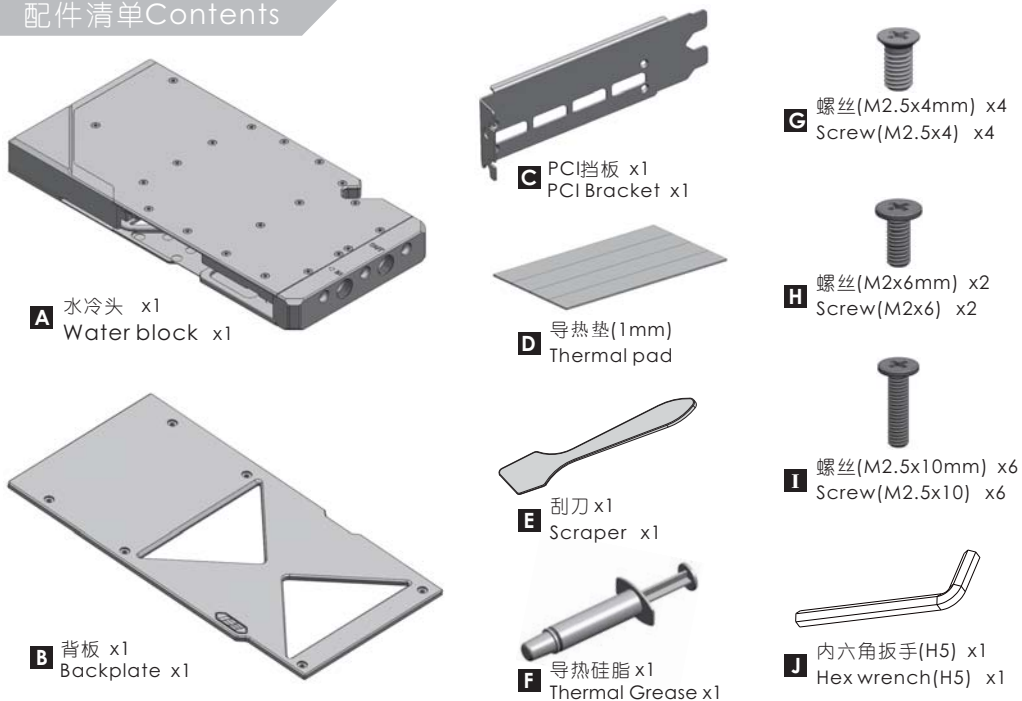


尺寸(Dimension)

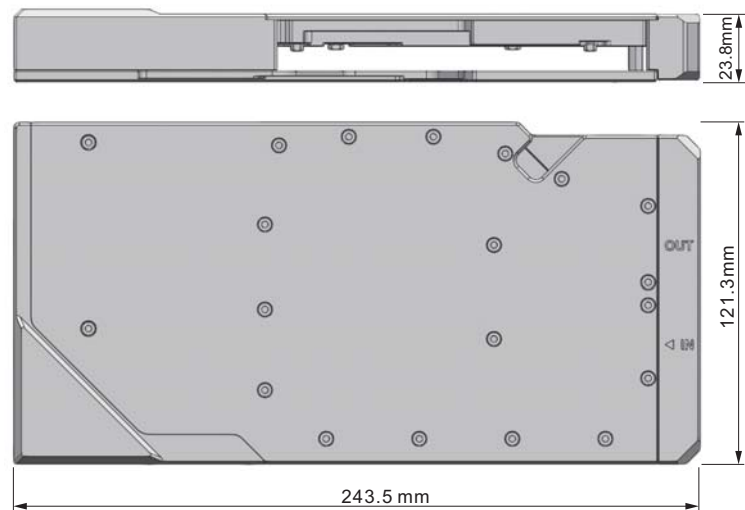


1、安装导热垫(Installing the thermal pad)

STEP 1: 清洁GPU表面，涂上硅脂。
Clean the GPU surface and apply thermal grease.

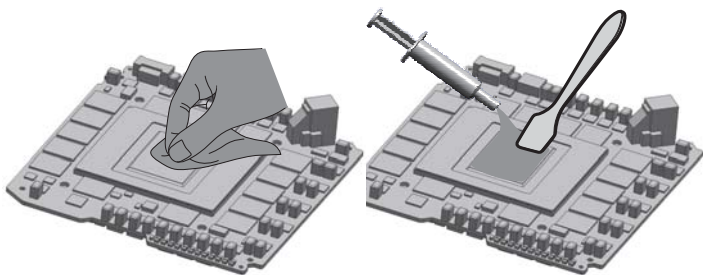


STEP 1:
将导热垫贴到图示位置。
Apply thermal pad to the indicated position.



2、安装显卡(Installing the VGA card)


将显卡安装到水冷头上，先安装X形支架和4个原装螺丝，再安装散热片和4个原装螺丝。
Install the graphics card onto the water cooling head. First, install the X-shaped bracket and the four original screws, then install the heat sink and the four original screws.

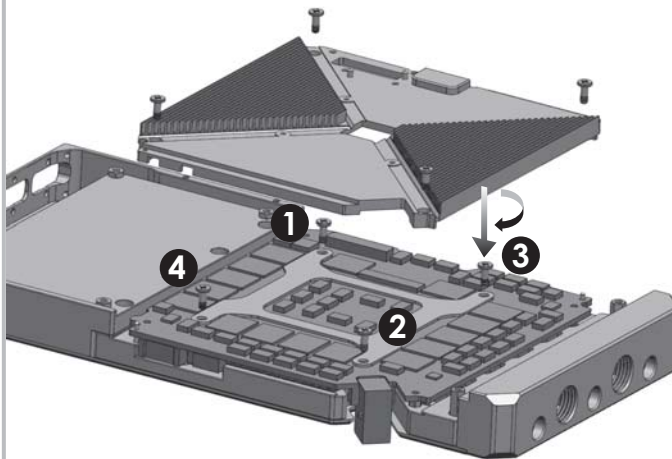

※ 水冷头中不包含X支架及螺丝，请使用原装风冷散热器上的X支架和螺丝！
The water block does not include the X bracket and screws.
Please use the X bracket and screws on the original air-cooler!

3、安装I/O板(Installing the I/O board)


安装I/O板，压紧连接器，再拧紧8个原装螺丝。
Install the I/O board, press the connector tightly, and then tighten the 8 original screws.

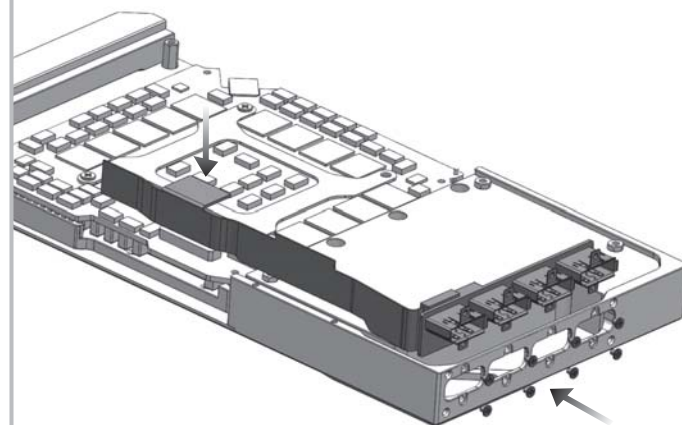

4、安装PCI板(Installing the PCI board)


STEP 1: 安装PCI板，并拧紧2个螺丝。
Install the PCI board and tighten the two screws.

STEP 2: 安装压板，并拧紧4个原装螺丝。
Install the pressure plate and tighten the four original screws.

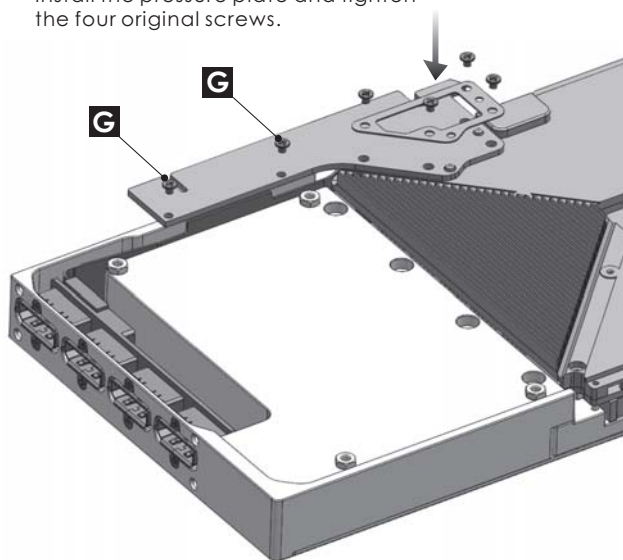

5、安装背板(Installing the backplate)

按图示将背板装到显卡背面，并拧紧6个螺丝。
Install the backplane to the back of the graphics card and tighten the six screws.

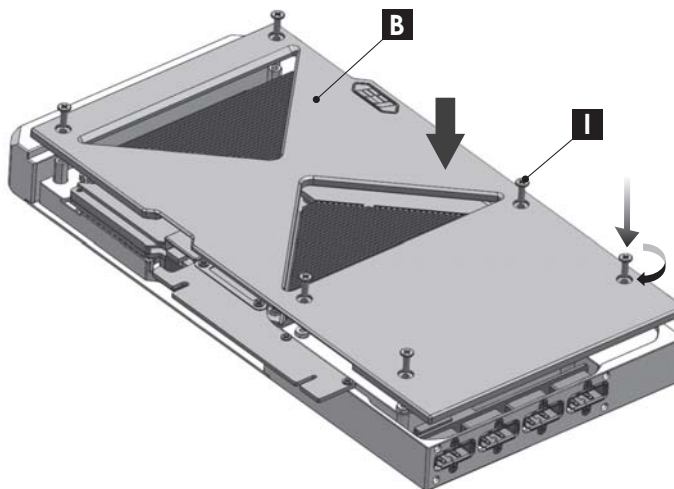

6、安装PCI支架(Install the PCI bracket)

安装PCI支架，并拧紧4个螺丝。
Install the PCI bracket and tighten the four screws.

